# PATENT APPLICATION TRANSMITTAL LETTER

(Small Entity)

Docket No. P24368 USA

# TO THE ASSISTANT COMMISSIONER FOR PATENTS

vicinity is a smitted herewith for filing under 35 U.S.C. 111 and 37 C.F.R. 1.53 is the patent application of:

M. CRAWFORD, JR.

cc:

For: METHOD AND APPARATUS FOR VIEWER-SPECIFIC PRESENTATION OF INFORMATION

10658 U.S. PTO 09/671431

		· · / <b> · /</b>					
Enclosed are:							
<ul><li>☑ Certificate of Mailin</li><li>☑ 12 (Informal)</li></ul>	sheets of dr	awings.		5921337	07US		
☐ A certified copy of			application.				
☑ Declaration	Signed.	Unsigned.					
Power of Attorney							
Information Disclos							
Preliminary Amend				0.			1.4.07
<b>Ö</b> One (1)		itement(s) to Est		entity St	tatus Under	37 C.F.R. 1.9	and 1.27.
Other: Assignmen	it and Acknowle	dgement postcard	<u>a</u>				
To the state of th		CLAIMS A	S FILED				
For	#Filed	#Allowed	#Extra		Rate		Fee
Total Claims	2	- 20 =	0	x	\$9.00		\$0.00
Indep. Claims	2	- 3 =	0	×	\$39.00		\$0.00
Multiple Dependent C	laims (check if	applicable)					\$0.00
E petr						BASIC FEE	\$345.00
					TOTAL	FILING FEE	\$345.00
☑ Charge ar	r is hereby auth w. A duplicate of amount of overpayment. by additional filing issue fee set in 37 C.F.R. 1.3	orized to charge copy of this sheet \$345.00 as ag fees required un 37 C.F.R. 1.18	t is enclosed. s filing fee. under 37 C.F.	eposit Ad	and 1.17.	19-5425  lowance,	
Dated. September 27,	2000		Syn 260	nestved 0 Aram:	Bernabeo, E t & Lechner ark Tower et Street		<b>0</b>

Philadelphia, PA 19107-2950 Telephone: 215-923-4466 Facsimile: 215-923-2189

# CERTIFICATE OF MAILING BY EXPRESS MAIL UNDER 37 CFR 1.10

EL592133707US

Express Mail Label Number

S&L Docket No. P24368 USA

I hereby certify that the attached Patent Application Transmittal Letter for Small Entity Concerning Filing Under 35 U.S.C. 111 and 37 C.F.R. 1.53, including a duplicate copy of the Transmittal Letter, Patent Application specification including 12 sheets of informal drawings, an Abstract, Declaration and Power of Attorney for Patent Application, Assignment, a Verified Statement Claiming Small Entity Status (Small Business Concern), and an acknowledgment postcard are being deposited with the United States Postal Service "Express Mail Post Office to Addressee" under 37 C.F.R. § 1.10 in an envelope addressed to the Box Patent Application, Commissioner for Patents, Washington, DC 20231 on September 27, 2000.

Douglas M. Cook

Synnestvedt & Lechner LLP

2600 Aramark Tower 1101 Market Street

Philadelphia, PA 19107-2950 Telephone: (215) 923-4466

Facsimile: (215) 923-2189

H	ENT (DECLARATION) CI .9(f) AND 1.27 (c)) - SMAL	LAIMING SMALL ENTIT LL BUSINESS CONCERN	Y Docket No. P24368 USA
Serial No.	Filing Date	Patent No.	Issue Date
N/A	Herewith	N/A	N/A
Applicant/ <b>JOHN M. CRAV</b> Patentee:	VFORD, JR.		
Invention: METHOD AN	) APPARATUS FOR VIEWER	-SPECIFIC PRESENTATION C	)F INFORMATION
	, , , , , , , , , , , , , , , , , , , ,		
I hereby declare that I am:			
an official of the s	·	d below: ered to act on behalf of the cond	ern identified below:
NAME OF CONCERN: FIL	RESTAR SYSTEMS, INC.	TYLYTO DD. D. L. 10000	
ADDRESS OF CONCERN:	3317 CREAMERY ROAD, NE	. W НОРЕ, РА 18938	
ົ່ 13 CFR 121.3-18, and repi	roduced in 37 CFR 1.9(d), for p	concern qualifies as a small bus purposes of paying reduced fer employees of the concern, inc	es under Section 41(a) and
s the average over the preference the preference the strength of the strength	evious fiscal year of the cond th of the pay periods of the fisc , one concern controls or has	nent, (1) the number of employed sern of the persons employed cal year, and (2) concerns are a the power to control the other	on a full-time, part-time or affiliates of each other when
	under contract or law have bee I to the above identified invention	en conveyed to and remain with on described in:	the small business concern
🖾 the specification	on filed herewith with title as list	ed above.	
the application	identified above.		
☐ the patent ider	itified above.		
organization having rights to person, other than the investigation	to the invention is listed on the entor, who could not qualify as	s concern are not exclusive, en ext page and no rights to the an independent inventor undecern under 37 CFR 1.9(d) or a result of the content	e invention are held by any er 37 CFR 1.9(c) or by any

obligation unde	er contract uch person,	or law to as:	sign, grant, con organization ex	neve assigned, granted, nvey, or license any rights xists. n is listed below.		
FULL NAME _ADDRESS _		lead at a second		Small O. June 2		Name of the state
FULL NAME		Individual		Small Suamess Concern		Nonprofit Organization
FULL NAME		Individuel		Small Business Concern	0	Nonprotit Organization
ADDRESS _		factividual		Small Business Concern		Nonprofit Organization
ADDRESS		Individual		Small Business Concarn		Nonprofit Organization
Invention aver I acknowledge entitlement to maintenance to I friereby deck- information ar willful false sta Title 18 of th	e the duty o small ent fee due atte are that all nd belief are atements a he United	to file, in the lity status per the date of statements believed to the like to States Coding to the like to the li	is application of the property of the paying, on which status on the paying of the paying of the paying and the	or patent, notification of a or at the time of paying as a small entity is no lor of my own knowledge are further that these statements able by fine or impri	any change in sing, the earliest nger appropriate re true and that ents were made somment, or botents may jeopa	t all statements made on with the knowledge that th, under Section 1001 of ardize the validity of the
NAME OF PER			DAVID FISH	ER		
TITLE OF PER		ING	PRESIDENT.	, FIRESTAR SYSTEMS, !	INC.	
		3IGNING:		IERY ROAD, NEW HOP		
SIGNATURE: `	-Scee	aid c	Male	Par DA	.те: <u>9-<b>27</b>-</u>	_ වූතාව

Patent

Docket No. P24368 USA

# METHOD AND APPARATUS FOR VIEWER-SPECIFIC PRESENTATION OF INFORMATION

## **RELATED APPLICATION**

This application claims the benefit of U.S. Provisional Application No. 60/156,344, filed September 27, 1999.

## FIELD OF THE INVENTION

This invention relates generally to the field of information systems and particularly to a method and apparatus for presenting a viewer-specific subset of information in a viewer-specific format.

## **BACKGROUND OF THE INVENTION**

Personalization of information increases the value of the information to an individual viewer. Information that is not specific to the role, motives, or needs of a viewer often proves to be of little use. However, that same information becomes more effective, persuasive, and informative once it is customized to the person viewing it. Because the needs of different viewers and viewer audiences vary so greatly, personalized information presentation is the most effective way to deal with multiple audiences, groups, markets, demographics, etc. This is particularly true for information aggregators or portals that

present diverse data to broad groups of viewers. Each broad group will contain many sub groups, and each sub group will have different needs and interests compared to other sub groups. The capability to meet these varied needs by creating viewer-specific information is readily recognized as being vital to the future of the information industry.

The most effective viewer-specific information is that which has been completely customized in terms of both content and visual design. The more elements of each that are personalized to the viewer, the more effective the information will be. An optimum presentation will therefore have complete personalization of each content and formatting element.

Current information presentation systems do not provide complete customization of each content and visual design element. Current systems also have three additional shortcomings: 1) they are unable to function well with incomplete source data, 2) they must be restructured or reprogrammed when either source data or viewer audiences change significantly, and 3) they are inefficient in their use of personalization logic, and therefore their use of computer memory and processor bandwidth.

The ability to work with incomplete data is paramount. For large amounts of data, or for very complex data, it is either difficult or impossible to completely populate a database containing personalized information for every possible convolution of viewer audiences. Regardless of whether or not this data is available, complete database population is neither economic nor feasible in terms of time or money. The only way a large-scale complete personalization system (one that independently personalizes each content and formatting element) can work effectively is through management by exception, through presenting the best data available for each element. Current information systems cannot dynamically

ascertain the best available data, regardless of data availability or lack thereof, for each content and formatting element. This makes current systems too complex and costly to function on a complete personalization level.

The ability to provide complete personalization without restructuring or reprogramming the system is vital. For a personalized information system to be cost effective and manageable, it must be able to handle not only standard data, but also any number of convolutions of personalized data. In any real world situation, both the standard and personalized data change continuously, as do the audiences they address. To have to restructure a database or reprogram a system every time there is a significant change in data or viewer needs would require prohibitive amounts of time, energy, and money. Current information presentation systems therefore cannot respond effectively to the changing needs of dynamic personalized information presentation.

The ability to provide complete personalization using minimal logic and processor bandwidth is also important. Any large-scale information presentation system that must serve hundreds or thousands of users needs to make efficient use of computer memory and processor bandwidth. Any system design that relies on extensive logic and program code for personalization will make significant demands on computer resources. To use such a design in a system serving thousands of simultaneous users will result in a system that is either too slow to be effective, or too expensive to be economical. Current personalization system designs require too much logic and processor bandwidth to provide complete dynamic personalization in large-scale systems.

The major purpose of this invention is to allow an information publisher to produce documents that have both information content and visual design customized to the

information viewer. It is also the purpose of this invention to provide said information personalization while avoiding the shortcomings of current information presentation systems in the areas of: customization completeness, the ability to deal with incomplete data, the ability to adapt to change without restructuring or reprogramming, and the ability to function with a minimum of logic and processor bandwidth.

More specifically, it is the purpose of this invention to 1) use interrelated groups of meta information that describe relationships between information viewers, entities about which information is published, entity data, and document design templates, 2) use the interaction between these sets of data to select and rank entities, 3) select appropriate data on those entities, and 4) select appropriate design formats, to 5) present documents describing entities that have both content and format customized to the information viewer.

## **SUMMARY OF THE INVENTION**

The present invention provides a method and apparatus for presenting to a viewer a viewer-specific subset of information in a viewer-specific format. Information is stored in one or more databases in a grouped and related manner which allows for selective presentation of information in selected formats. Predefined profiles are established so that when a viewer wishes to view information, the information is presented to the viewer in accordance with an appropriate profile. Metadata defining relationships between the viewer and/or the data allows search queries to be conducted on a viewer-customized, restricted subset of the information. The predefined profiles may also provide a hierarchy for ranked order of information presentation or for use to present information when the most preferred information is not available in a database. Metadata defining relationships between the view

and/or design formats allows the viewer-customized, restricted subset of information to be presented in a viewer customized format or design. The predefined profiles may also provide a hierarchy for presentation formats for use to present information when the most preferred presentation format is not available in a database. The inventive method and system thereby provides for highly customized data presentation.

## **DESCRIPTION OF THE DRAWINGS**

Figure 1 is a block diagram depicting exemplary data stores in accordance with the present invention;

Figure 2 is a logic diagram of a data store in accordance with the present invention;

Figure 3 is a logic diagram of an exemplary storage of data in a data store in accordance with Figure 2 in accordance with one embodiment of the present invention;

Figure 4 is a logic diagram of an exemplary storage of data in a data store in accordance with Figure 2 in accordance with one embodiment of the present invention;

Figure 5 is a block diagram depicting exemplary logic of document creation for the example of Figure 1 in accordance with the present invention;

Figure 6 is an exemplary presentation template in accordance with the present invention;

Figure 7 is an exemplary block diagram depicting relationships between system data stores when implemented using an SQL database in accordance with the present invention;

Figure 8 is an exemplary block diagram depicting relationships between system data stores when implemented using an SQL database in accordance with the present invention;

Figure 9 is an exemplary block diagram depicting relationships between system data stores when implemented using an SQL database in accordance with the present invention;

Figure 10 is a block diagram of an exemplary information server 100 in accordance with the present invention;

Figure 11 is a flow diagram of exemplary data display steps in accordance with the present invention;

Figure 12 is a flow diagram of exemplary data search steps in accordance with the present invention;

Figure 13 is an exemplary document produced using the template of Figure 6;

Figure 14 is an exemplary document having data elements common to the exemplary document of Figure 13, but using a customized template and different data elements suitable for a German viewer; and

Figure 15 is an exemplary document having data elements common to the exemplary document of Figure 13, but using a customized template and different data elements suitable for the health care industry.

## DETAILED DESCRIPTION

The present invention provides a method and apparatus for presenting to a viewer a viewer-specific subset of information in a viewer-specific format. In other words, information is stored in a database or multiple databases in a grouped and related manner which allows for selective presentation of information in selected formats. Stored data includes templates for presenting the information. Predefined viewer profiles (viewer states) are established so that when a viewer wishes to view information, the information is

presented to the viewer in accordance with an appropriate viewer state. Metadata defining relationships between the viewer and/or the data allows search queries to be conducted on a viewer customized, restricted subset of the information. For example, the profile indicates which classes of information a viewer will receive, e.g., a class of products relating to the food service industry, which data elements the viewer will receive, e.g., German language content relating to certain food preparation products, and which format template will be used to present the data, e.g., a specific HTML coded web page template. The predefined profiles may also provide a hierarchy for ranked order of information presentation or for use to present information when the most preferred information is not available, e.g., when the database is not populated with German language content, English language content may be provided.

The inventive method and system thereby provides opportunities to highly customize data presentation for diverse viewers, allows for presentation of information for an incomplete database, and allows for rapid entry into new markets, e.g., Australian health care, or new information presentation platforms, e.g., wireless Web, with only minimal additions and/or revisions to the system.

The present invention uses one or more data stores containing data relating to entities, entity information, and presentation templates and one or more data stores containing metadata defining viewer states, entity states, data states, and presentation states. For example, each data store may be a traditional row-and-column database, an object database, a text base, or any other suitable type of data store. By relating the data stored in these data stores, the present invention allows for production of documents and/or information

presentations (collectively "presentations") that have both content and format customized to the information viewer.

For an overview of how the invention operates, see Figure 5 (later described in more detail). A viewer is assigned a Viewer State defining metadata regarding which Entity States, Data States, and Presentation States are most appropriate to the viewer. The list of Entity States ranks and restricts the entities about which the viewer can obtain information, e.g., a viewer in the food preparation industry will view only products related to that industry, and if looking at a list of products, will see the most appropriate products first. The list of Data States defines which elements of data describing the selected entities will be presented to the viewer, e.g., the food preparation viewer will be shown data specific to the food preparation industry when available. The list of Presentation States defines which visual formats or designs will be used to present the selected data elements on the selected entities, e.g., the invention will use a visual format specific to the food preparation industry, when available, to display the selected industry-specific data on the selected industry-specific products. The end result is a system that displays information where both the information content and format are customized to the Viewer State according to the Entity States, Data States, and Presentation States associated with the Viewer State.

Figure 1 is a block diagram 10 depicting relationships among various data stores in accordance with the present invention. Figure 1 shows an Entities data store 12. The Entities data store 12 contains a record, i.e., entry, for each entity to be described by the system. In the example of Figure 1, the system stores entity data relating to industrial apparel products, including gloves, boots, and chaps. In this example, an EntityClasses data store 13 stores a

record for each class of apparel products, e.g., gloves, boots, and chaps, each having a unique entity class identification key ("entity class ID"), e.g., ec1 for gloves.

Figure 2 is a logic diagram of an exemplary data store 50 in accordance with the present invention. For example, the exemplary data store 50 could be stored on a hard disk drive or CD-ROM and is capable of storing a plurality of records 52, as is well-known in the art.

Each record in the Entities data store 12 includes a corresponding entity class ID, e.g., ec1 stored in association with a unique entity identification key ("entity ID"), e.g., e1. Each record also includes a list or collection of unique entity state identification keys ("entity state ID's"), e.g. es1, that correspond to one or more entity states from the EntityStates data store 14. In other words, each record in the Entities data store includes fields for storing an entity ID, entity state ID and an entity class ID. Figure 3 is a logic diagram of an exemplary storage of data in a record 52 of a data store 50 in accordance with one embodiment of the present invention. As shown in Figure 3, the record 52 includes fields, 60, 62, 64 for storing an entity ID, entity state ID, and entity class ID. For example, the Entities data store 12 stores a record for a vinyl glove. The record includes an entity ID of e1, a collection of entity state ID's including es1, es2, es3, es4 and es5, and an entity class ID of ec1. Accordingly, the Entities data store contains data about relationships between other data elements. In this manner, many entities and entity data elements can be grouped by relatively few entity states.

Figure 1 also shows a EntityData data store 16. The EntityData data store 16 contains a record for data elements for the various entities. In the example of Figure 1, the system stores data elements relating to the gloves, boots, and chaps products, e.g., a name, a description, and price for the vinyl glove, etc. Each record in the EntityData data store 16

includes a data element and a corresponding entity ID which associates it with an entity from the Entities data store 12, e.g., e1. In this example, a DataTypes data store 17 stores a record for each type of data element, e.g., name, description, price, etc., each having a unique data type identification key ("data type ID"), e.g., dt1 for name. Each record in the EntityData data store 16 is also associated with a data type ID, e.g., dt1. Each record in the EntityData data store 16 is further associated with a data state identification code ("data state ID") that corresponds to a data state from the DataStates data store 18. In other words, each record in the EntityData data store 16 includes fields for storing an entity data element, entity ID, data type ID, and data state ID. In the example of Figure 1, the EntityData data store 16 stores several records for the vinyl glove. For example, "Vinyl glove name" is the data element for the vinyl glove, the associated entity ID is e1, the associated data type is dt1, and the associated data state is ds1.

Figure 1 also shows a PresentationTemplates data store 20. The PresentationTemplates data store 20 contains multiple presentation design templates. Each template is a text or binary file constructed to have a distinct layout and to have all necessary data and/or programming code to present the information in a specific medium, such as Web (html, xml), wireless (wml), print, etc. The actual format will depend upon the design of the template, e.g., title at top or bottom or page, in bold or non-bold type, with or without certain graphics layouts, etc. Each template can be as small as a single phrase, line, or subdocument in a larger document, or can be an independent standalone document. A separate template can be designed for use to appeal to each class of viewers, e.g., one for retail customers, one for wholesale customers, one for health care industry customers, one for food preparation industry customers, etc. Figure 4 is a logic diagram of an exemplary storage of data in an

alternate record 52' of a data store 50 in accordance with one embodiment of the present invention. As shown in Figure 4, the record 52' includes fields, 70, 72, 74, 76 for storing a viewer state, a list of corresponding entity states, a list of corresponding data states, and a list of corresponding presentation states, respectively. An exemplary template including HTML code for presenting data in a Web-based format is shown in Figure 6.

In the example of Figure 1, the system stores presentation template data relating to the gloves, boots, and chaps products. For example, the various templates are designed for presenting glove information to the food preparation industry, health care industry, etc. Each template in the PresentationTemplate data store 20 is associated with an entity class ID and a unique presentation state identification key, presentation state ID. In other words, each record in the PresentationTemplate data store 20 includes fields for storing presentation template data, an entity class ID, and a presentation state ID. In the example of Figure 1, the PresentationTemplate data store 20 stores several templates for use to display glove-related information, e.g., information relating to entity class ec1. Accordingly, the "Glove default" presentation template could be used to present glove data.

Various state data stores are compiled and stored to define metadata, i.e., data defining relationships of the data stored in the Entities, Entity Data and Presentation Templates data stores. These states are defined using logic external to the system, e.g., marketing strategy.

An EntityStates data store 14 is shown in Figure 1. The EntityStates data store 14 contains a record for each category of entities to be described by the system. Categories are defined as groups of entities in which an information viewer may be interested. In the example of Figure 1, the EntityStates data store includes Default, FoodPrep, HealthCare,

Industrial, Work and Office categories. For example, the FoodPrep entity state is suitable for an information viewer in the food preparation industry.

Each record in the EntityStates data store 14 includes a unique entity state identification key EntityStateID, e.g., es1. Each entity in the Entities data store is related by a many-to-many relationship to one or more entity states in the EntityStates data store. Accordingly, each entity state is associated with a certain subset of entities. For example, the Default entity state is associated with the vinyl, latex, work, Kevlar and Nitrile gloves while the FoodPrep entity state is associated with only the vinyl, latex, work and Kevlar gloves because a Nitrile glove would be unsuitable for use in the food preparation industry.

A DataStates data store 18 is shown in Figure 1. The DataStates data store 18 contains a record for each class of users to be serviced by the system. In the example of Figure 1, the DataStates data store includes Default, FoodPrep, HealthCare, Industrial, Wholesale, DefaultGerman, FoodPrepGerman, HealthCareGerman, IndustrialGerman and WholesaleGerman classes. For example, the FoodPrepGerman data state is suitable for an information viewer in the food preparation industry that wishes to receive information in the German language, where possible.

Each record in the DataStates data store 18 includes a unique data state identification key DataStateID, e.g., ds1. Each entry in the DataStates data store 18 is related by a one-to-many relationship to one or more entries in the EntityData data store 16 by the DataState ID. Accordingly, each data state is associated with a certain subset of entity data elements. For example, the Default data state is associated with a certain vinyl glove name, a certain vinyl glove description and a certain vinyl glove price.

A PresentationStates data store 22 is shown in Figure 1. The PresentationStates data store 22 contains a record for each class of presentation viewers to be supported by the system. In the example of Figure 1, the PresentationStates data store includes Default, FoodPrep, HealthCare, Industrial, Wholesale, DefaultGerman, FoodPrepGerman, HealthCareGerman, IndustrialGerman and WholesaleGerman classes. For example, the FoodPrepGerman presentation state is suitable for an information viewer in the food preparation industry.

Each record in the PresentationStates data store 22 includes a unique presentation state identification key presentation state ID, e.g., ps1. Each presentation state in the PresentationStates data store is related to one or more presentation templates in the PresentationTemplates data store 20 using the presentation state ID. Accordingly, each presentation state is associated with a certain subset of presentation template data.

In accordance with the present invention, viewer states defining viewer profiles are defined and stored in a ViewerStates data store, as shown at 40 in Figure 1. In other words, the ViewerStates data store stored metadata defining relationships between viewer states and metadata in the EntityStates, DataStates and PresentationStates data stores. Each viewer state includes hierarchies of classes of information. An individual viewer may be assigned a viewer state by any suitable method, typically involving marketing strategy and/or judgment as to the type and/or format of information the viewer is most likely to want to receive. Accordingly, this ViewerState data store contains the information needed for viewer-specific customization.

Each record in the ViewerStates data store 40 stores information relating to a viewer state, e.g., Industrial, and corresponding hierarchies of EntityStates, DataStates, and

PresentationStates. The EntityStates are hierarchical in that they rank one or more entity states in order of preference. The states are supplemental, and not alternative. Because fewer than all entity states may be listed, this list restricts the entity data to produce a selected subset of data, e.g., entities associated with other entity states will not be presented to the viewer. For example, for the Industrial viewer state, an entity state of e4 (Industrial) is most preferred and an entity state of e5 (Work) is second most preferred. Because these entity states are supplemental, all information relating to entity states e4 and e5 will be presented to the user. However, the information relating to entity state e4 will be given preferential treatment, i.e., presented to the user before information relating to entity state e5. In this manner, an Industrial viewer will receive information coded as Industrial first, since this information may also be relevant but probably not as relevant as information coded as Industrial.

The DataStates and PresentationStates are cascading. In other words, they are alternatives arranged in a hierarchical fashion. For example, for the FoodPrepGerman viewer state, the presentation state hierarchy is ps7, ps6, ps2, and ps1. In this example, ps7 is most highly preferred and ps1 is least preferred. Other presentation states will not be used. Accordingly, information will be presented to a user using ps7, if the PresentationTemplates data store is populated with a template coded with a presentation state ID of ps7, ps6 if ps7 is not available, ps2 if ps6 is not available, and ps1 if ps2 is not available. This allows a viewer's request for information to be serviced before a database is complete. For example, during construction, the database could be first populated with ps1 information. Later the database could be supplemented to add ps2, then ps6 then ps7, providing further system

development but providing operability during the development time, which for many databases spans the life of the database.

In operation, an information viewer first makes a request, or prepares to make a request. For example, the information viewer may log on to the computer system using a suitable technique well known in the art. At this point, a viewer class is determined, e.g., by reading a suitable cookie stored on the viewer's client computer, by receiving input of viewer state information from the viewer, etc.

After identifying a viewer state corresponding to the viewer, the system identifies corresponding entity state and data state information by reference to the ViewerState data store 40. The system then compares the Entity States described in the viewer's Viewer State, and then selects, restricts, and/or ranks related Entities accordingly. The system then compares the Data States described in the Viewer States, and then selects the most appropriate data elements from the Entities Data data store that relate to the selected entities, selecting no more than one data element of each Data Type for each entity. In essence, the entire database of entities and entity data is restricted, prior to the user's query, to produce a subset of information which will be used for the viewer's query. This is achieved by searching, in response to a query, only among the entities and entity data that correspond to the entity state and data state information provided in association with the viewer's viewer state. This allows the viewer to conduct queries on data that has already been customized to the viewer. For example, a viewer assigned a FoodPrep Viewer State will search only through subsets of Entities and Entity Data that are most suited to the food preparation industry. Additionally, it removes the possibility of returning to the viewer information not intended for the viewer's eyes, e.g., a wholesale price when the viewer is a retail buyer. For

example, a viewer assigned a FoodPrep viewer state will have his search request performed by searching only through entities in the Entities data store 12 associated with entity state es2, namely, the vinyl, latex, work and Kevlar gloves, i.e., entities with an entityID of e1, e2, e3 or e4.

Additionally, the search request will be performed by searching through the entity data information in the EntityData data store 16 associated with entities with an entityID of e1, e2, e3 or e4. Each data element in the EntityData data store 16 has an associated data type, e.g., dt1, and multiple data elements may exist for each data type, for each entity.

The FoodPrep viewer state is associated with a cascading list of data states, e.g., ds2 and ds1. For each entity having an entityID of e1-e4, a data element in the EntityData data store 16 is selected for each data type, e.g., dt1, dt2, dt3 and dt4. The viewer-specific data element is determined in accordance with the hierarchy of cascading data states.

Accordingly, for each data type, the data element having a data state of ds2 is used unless no such data element is stored in the EntityData data store 16, at which time a data element having a data state of ds1 is used. Accordingly, if the viewer searches for a vinyl glove named VIN-X, the system will only search among the viewer-specific data elements in the EntityData data store 16 corresponding to a) the viewer-specific entities in the Entities data store 12, as set forth by in the entity states specified in the ViewerState data store 40, and b) the viewer-specific data in the Entity Data data store 16, as set forth by the data state specified in the ViewerState data store 40. As a practical matter, this may require the execution or one or more database queries.

Finally, the system selects an appropriate presentation template from the PresentationTemplate data store 20. The presentation template is selected for each entity

class ID, e.g., ec1, in accordance with the cascading list of presentation states set forth in the ViewerState data store 40 in association with the viewer's assigned viewer state. For example, for entities having an entity class ID of ec1 (gloves), a viewer assigned a viewer state of FoodPrepGerman will be presented information using a presentation corresponding to presentation state ps7 if available, ps6 if ps7 is not available, ps2 if ps6 is not available, and ps1 if ps2 is not available. In the example, ps7 is available and would be used for presenting data relating to gloves to such a viewer.

The end result is a collection of one or more information presentations, each of which has been selected, restricted, and ranked based upon the information viewer. Each document in this collection has both its content and its format customized to the information viewer. This customization of content and format represent a marked increase in the utility and effectiveness of the information presented.

Figure 5 is a block diagram depicting exemplary logic of document creation for the example of Figure 1, namely for the FoodPrepGerman viewer state. Figure 5 shows the data selected by the invention from each data store according to data relationships and source data depicted in Figure 1. Figure 5 does not show actual data presentation in corresponding presentation templates, but rather shows the information that is to be presented in a suitable template.

In review, figure 5 illustrates the following process: a) the viewer state FoodPrepGerman is selected, signifying a viewer in the food preparation industry in Germany; b) the FoodPrepGerman viewer state specifies entities with the FoodPrepGerman if state es2; c) the FoodPrepGerman viewer state specifies data states of FoodPrepGerman if available, if not then FoodPrep if available, if not

then Default, cascading from ds7 to ds6 to ds2 to ds1; d) the FoodPrepGerman viewer state specifies presentation states of FoodPrepGerman if available, if not, then DefaultGerman if available, if not then FoodPrep if available, if not then Default, cascading from ps7 to ps6 to ps2 to ps1; e) the specified entity states select the products Vinyl glove, Latex glove, Work glove, and Kevlar glove, all which include entity state es2; f) the specified data states select one name, description, and price for each glove, choosing the data element for each that has the highest-ranking data state as defined by the cascading list ds7 to ds6 to ds2 to ds1; g) the specified presentation states select the Glove food Gmn presentation template because it possesses the highest-ranking presentation state as defined by the cascading list ps7 to ps6 to ps2 to ps1; h) output documents are created for each selected entity, displaying each selected data element, in the format of the selected presentation template. The resultant output consists of documents describing products related to the German food preparation industry, with data most appropriate to that industry, using presentation formats most appropriate to that industry.

The methods used by this invention render it superior to prior art in a number of ways:

1) The means of storing data elements as tagged rows in a data store enables new data types and data states to be added to the system at any time without changing the structure or schema of the data stores. Existing systems use methods of data storage that require restructuring of data stores to accommodate changes in data types or data states. Such a design is neither practical nor efficient when publishing customized information presentation where viewer roles or source data change on a regular basis. This invention is therefore more flexible and more adaptable to change than prior art, allowing information

publishers to switch to new viewer roles markets or new products with simply the addition of a few new presentation templates or data elements. For example, a traditional system may have to be restructured when servicing a new industry, such adding the plumbing industry to the list of food preparation, health care, and industrial industries, or storing data on new types of entities, such as adding wrenches and pipes to an existing list of gloves and boots to. This invention could accommodate such changes without any changes to its basic design.

- 2) The means of storing data elements as tagged rows in a data store enables unlimited numbers of data types and data states to be added to the system. Existing systems using row-and-column databases face practical limits of the number of fields of information that can be stored. A combination of 40 different data types, with data states accommodating 10 industries in 5 languages would require 2000 unique fields of information, a collection of fields significantly greater than the limit of 255 fields or 1024 fields inherent in many databases. This invention simply adds more data types and data states as required, provided that there is enough storage space to hold all the information. This enables a company using this invention to change and add viewer roles and data types at any time, knowing that future change will not create an insurmountable obstacle brought on by system architecture.
- 3) The means of storing data elements as tagged rows in a data store enables relevant data elements to be selected by a highly efficient database query without running data selection logic in the form of program code. Existing systems use storage methods that fix the use of each data element as a single named field of information. This fixation means that a simple query cannot be used to select the most appropriate data element for any given data type. Instead, program code must be executed to properly select each data type for each entity. For a system searching 10,000 rows of data (entities) with 40 data types, this would

require executing a complex function 400,000 times, an amount of overhead that can render large-scale information systems ineffective. Since this invention does not require running such complex functions, data element selection happens quickly in queries at the database server level, and no such overhead is incurred. When used for complete personalization, this allows someone using the invention to utilize much less powerful (and therefore less costly) computer hardware to run the system, to service more simultaneous users or more complex data with the same hardware, or to service combinations of large numbers of simultaneous users and complex data that would not be possible with traditional systems.

4) The means of using cascading data states enables the invention to function with incomplete data, returning the most appropriate data elements and most appropriate presentation formats available in the data stores. Existing systems cannot adapt well to incomplete data, and therefore run into problems when presented with data stores that are not fully populated with each convolution of data types and data states. Since it is neither practical nor economically feasible to completely populate large scale databases with data for every combination of data type and data state, existing systems face significant shortcomings when used to present viewer-specific information. On the other hand, once default data is present, this invention functions well with any additional amount of data, allowing the invention to be used as databases become more completely populated, and as new viewer roles and data arise, thereby creating new states of data incompleteness. For example, this invention would become operable simply with default data and one presentation template for each viewer state such as food preparation, health care, and industrial, even though other viewer-specific data has not yet been entered. The system will simply grow more effective as the database becomes more completely populated. This allows a company using the

system to quickly get a project off the ground quickly with a minimum of data, and then later invest time and effort into further data population as dictated by business requirements.

- 5) The means of using cascading presentation states enables the invention to function with incomplete collections of presentation templates, returning the most appropriate presentation format available in the data store. As with incomplete content, existing systems do not adapt well to incomplete collections of presentation formats. The cascading presentation states also confer the benefit of moving into different output media simply by adding new media-specific output templates to the PresentationTemplates data store. This would allow someone using the system to move from Internet and Print output to wireless device output while using existing entity data simply by adding a set of wireless device output templates. Likewise, new markets and viewer roles can be serviced using existing entity data simply by adding new presentation templates.
- 6) The means of tagging each element of data with both a data type and a single data state from a series of cascading data states enables every single content element in an output documents to be customized to the viewer role. Because of structural and logic limitations of existing systems, they are not used to present complete content customization. This invention is therefore more appropriate any time complete content customization is desired. For example, while an existing system might be able to customize a product description to a viewer role, this invention could customize the product name, description, price, caption, pictures, video, etc. to each viewer role, providing a much more effective presentation.
- 7) The means of tagging each presentation template with a single data state from a series of cascading presentation states enables every single presentation format template used to create output documents to be customized to the viewer role. The same structural and

logic limitations of existing systems with respect to complete content customization apply to complete presentation format customization as well. For example, this would allow a company to present data with an "edgy" design to young investors fitting a youthful viewer state profile, while the same basic information could be presented with a conservative layout and graphics for viewers fitting a more conservative investor profile.

In general, the present invention always provides the best information available, with the best presentation format available as determined by the system. The same viewer may request the same information, but get more highly customized results as the database grows to include customized information. Different viewers may request the same information, but get more highly customized results as the database grows to include more customized. This can be done by simply storing additional information in the database, without significant changes to the overall database structure or system software. Complete customization ,changes to viewer roles, types of data stored, markets served, etc., can all be accomplished by changing information in the database, and therefore do not present the same problems to this invention that they do to traditional systems.

This invention, therefore, accomplishes its goals of surpassing prior art by providing complete content and visual design customization, adapting well to incomplete data, adapting well to changes in viewer roles and data types without restructuring or reprogramming, and functioning with a minimum of logic and processor bandwidth.

Figure 10 is a block diagram of an exemplary information server 100 in accordance with the present invention. The hardware of the information server is of a type generally known in the art. The information server includes a central processing unit ("CPU") 102, random access memory ("RAM") 104, read only memory ("ROM") 106, and a

communications port ("COMM PORT") 108 connected to a network interface device 110 for communicating over a communications network. The information server 100 also includes a storage memory including a storage device 112 for storing data including programs for carrying out the inventive method.

Having thus described particular embodiments of the invention, various alterations, modifications, and improvements will readily occur to those skilled in the art. Such alterations, modifications and improvements as are made obvious by this disclosure are intended to be part of this description though not expressly stated herein, and are intended to be within the spirit and scope of the invention. For example, the entity states in the viewer states data store could be cascading instead of supplemental. For example, the invention could be implemented using a structured query language (SQL) or object database. In such an embodiment, additional data stores (object classes, SQL database tables, etc.) are created for EntitiesToEntityStates and EntitiesToPresentationStates to model many-to-many relationships. An example of these data stores and relationships is shown in Figure 7. For example, in the EntitiesToEntityStates data store, a record is added for each entity-toentityState relationship, with this record containing the entityID of an entity and the entityStateID of the corresponding entity state. In an object database this will require the relationship to be modeled by adding an entityStates field to each entity object, said field containing a collection of entityStateID's instead of a single value. Additionally, each entry in the PresentationStates data store is related to one or more entries in the PresentationTemplates data store using an intermediary table such as PresentationStatesToPresentationTemplates in which a record is added for PresentationStateto-PresentationTemplate relationship, with this record containing the PresentationStateID of

a PresentationState and the PresentationTemplateID of a PresentationTemplate. In an object database this will require the relationship to be modeled by adding a PresentationStates field to each PresentationTemplate object, the field containing a collection of PresentationStateID's instead of a single value. For an SQL implementation, data stores are also created for ViewerStatesToEntityStates, ViewerStatesToDataStates, and ViewerStatesToPresentationStates to model many-to-many relationships. An example of these data stores and relationships is shown in Figure 8. Additional necessary modifications are shown in Figure 9.

Likewise, the invention could be implemented using related information files using the XML standard or other data tagging schemes. Files or collections of files could be created to represent each data store in the system. For example, an XML file for each entity could be created containing all entity data related to that entity, with each data element being tagged differently to later allow selection according to data states specified by a viewer's Viewer State. In this implementation, XML files could be stored either as individual files on a server, or inside an XML-enabled database. Other data stores could be implemented in files or in databases as dictated by design requirements. Templates could be created as media-specific template files, or as XSL template files that work with specifically with XML data. As with SQL database and object database implementations, the essence of the invention relates to the techniques used to select, customize, and rank entities, entity data, and presentation templates so that both content and visual design of each presentation are customized to a particular viewer state. Specific means of physically storing and retrieving information related to this process are beyond the scope of this invention.

Accordingly, the foregoing description is by way of example only, and not limiting.

The invention is limited only as defined in the following claims and equivalents thereto.

What is claimed is:

1. A computer-implemented method for viewer-specific presentation of information, the method using a computer comprising a CPU, a memory operatively connected to the CPU, and a program stored in the memory and executable by the CPU for presenting information, the method comprising the steps of:


- (a) receiving a request for information from a viewer;
- (b) identifying a viewer state associated with said viewer, said viewer state;
- (c) identifying a collection of one or more data states related to said viewer state, in a ranked order of preference for satisfying a request for information for said viewer state;
  - (d) identifying a collection of multiple data types;
- (e) identifying a data store containing multiple data elements, each element of which is tagged with one of said data states and one of said data types;
- (f) selecting viewer-specific data elements from said data store by examining all data elements related to each data type, and for each data type selecting the data element possessing the highest ranked data state specified by said ranked viewer states;
- (d) presenting said viewer-specific data elements to said viewer to satisfy said viewer's request for information.

## METHOD AND APPARATUS FOR VIEWER-SPECIFIC PRESENTATION OF INFORMATION

## ABSTRACT OF THE INVENTION

A computer-implemented method for viewer-specific presentation of information. The method includes a first step of receiving a request for information from a viewer. A viewer state associated with the viewer is then identified. The viewer state then provides a list of one or more data states in a ranked order of preference for satisfying a request for information for said viewer state. A data store contains data elements of a variety of data types, each data element tagged with a specific data type and data state. A collection of viewer-specific data elements is selected by searching the data store, and for each data type selecting the data element possessing the highest ranked data state specified by said ranked viewer states. The viewer-specific data elements are then presented to the viewer to satisfy the request for information. Accordingly, the present invention provides a method and apparatus for presenting to a viewer a viewer-specific subset of information. In one embodiment, the information is presented in a viewer-specific format. An apparatus for carrying out the inventive method is also provided.

M:\GBernabeo\Firestar\P24368usa\PatentOffice\APPLICATION.wpd

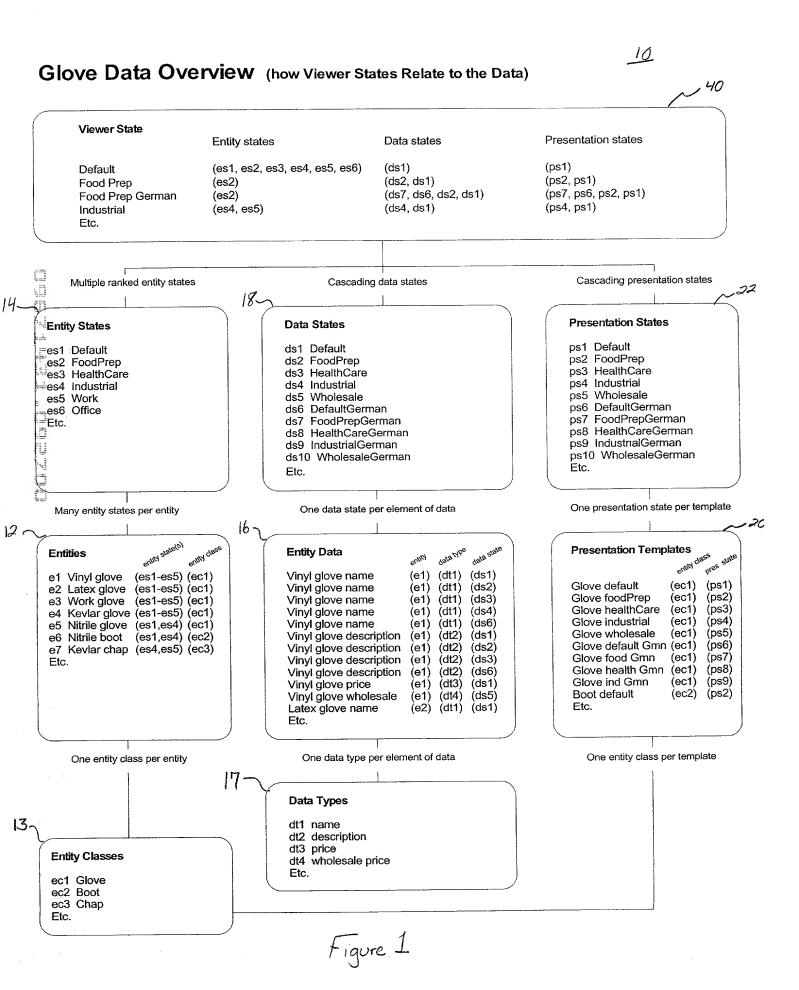

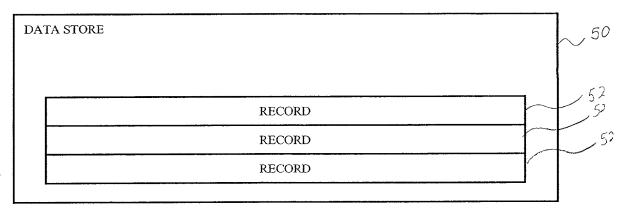


Figure 2

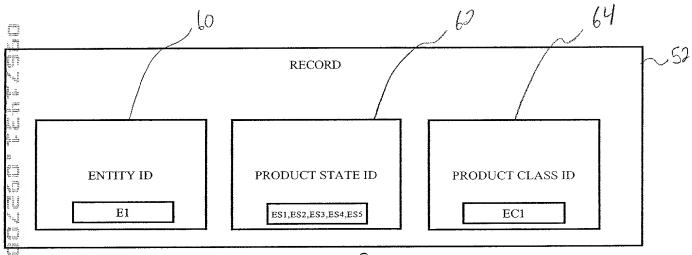


Figure  $\mathcal{S}$ 


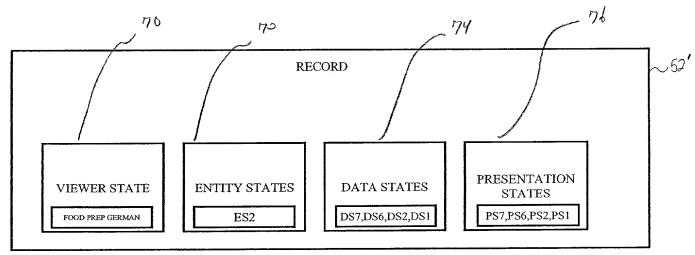


Figure 4



Darre D

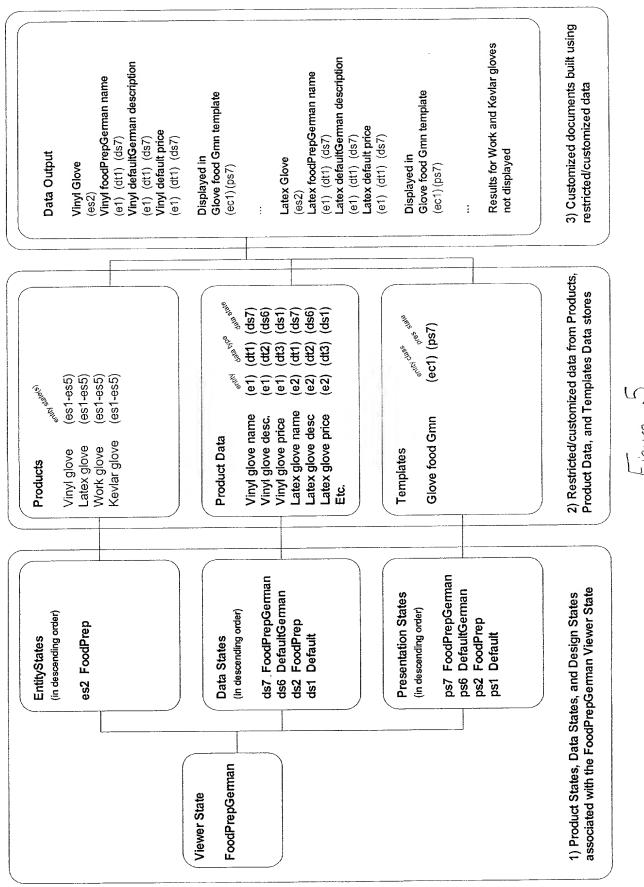

[/caption] [/end]

Prod.#

[/productNumber] [/end]

Color


Price

[/color] [/end]

[/price][/end]

Size [/size][/end]


[/note][/end] ([/productNumber]{/end])







Copyright ©2000 Firestar Systems Incorporated All rights reserved

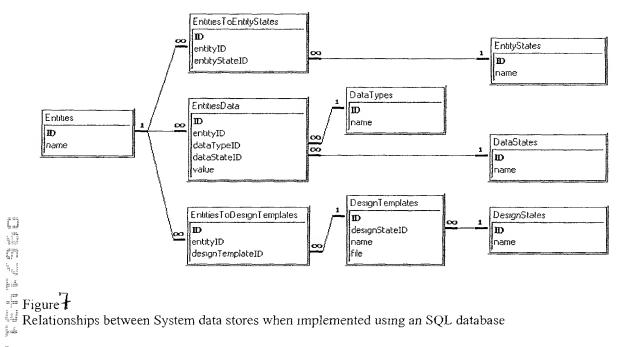

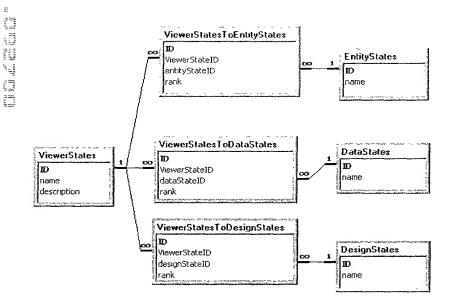


Figure 8 Relationships between User data stores when implemented using an SQL database


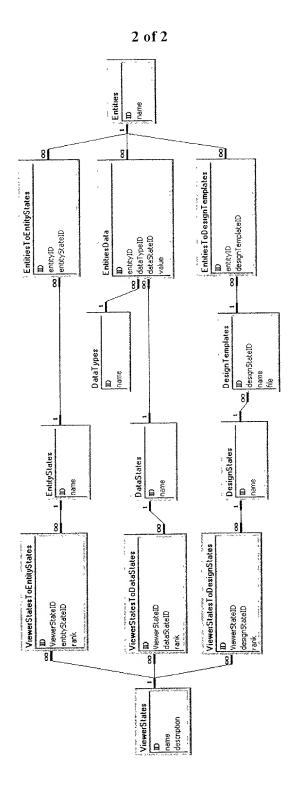


Figure **9**Relationships between all primary data stores when implemented using an SQL database

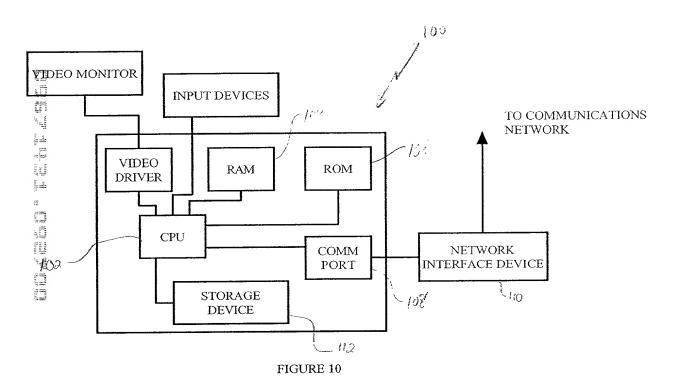

# Data Display Steps (how the system creates a document describing a specific entity)

# 1) Viewer State Creation

Viewer state is created, assigning to the state:

- 1) Ranked entity states
- 2) Cascading data states
- 3) Cascading presentation states

Viewer state is either created ahead of dynamically by logic external to the time by system administrator, or

# 2) Viewer State Selection

Viewer state is assigned to current viewer thereby linking viewer to the collection of presentation states associated with the using logic external to the system, entity states, data states, and viewer state.

viewing process, our could be determined can be chosen by the viewer during the given viewer demographics purchase time, such as with a known customer, Viewer state can be known ahead of nistories, etc.

# Viewer Document Request

Viewer requests a a document on a documents created during the data search portion of system operaion. specific entity from a list of entity

See the related "Data Search Steps" flow chart for more information on how data searches are performed.

# 4) Base Conditions Creation

System examines the viewer's viewer state and creates a means of extracting all related data from Entities and EntitiesData data stores The product of this step is a subset of data from the 1) Elements of data related to the specified entity data stores where:

related to each entity. The most appropriate data element for each dataType for each Entity will be

are selected from the EntitiesData data store

selected according to the cascading data states

The result is a data set, or a query that defines a data set, where the most appropriate data describing the entity has been found associated with the viewerState.

# 5) Template Selection

An output template is selected from the PresentationStates associated with the PresentationTemplates data store according to the cascading ViewerState.

template locating tags that specify which

The system searches through the

DataTypes will be displayed. When a tag is found, the system examines the

# 6) Document Creation

previous step is displayed to the viewer A document is created from the selected Presentation Template,

The output document created in the 7) Display Document

- igue 1/

The process continues until all tags have been examined.

that data type, inserts the data into the

document.

Creation step, and if data is found for

result set from the Base Conditions

# Data Search Steps (how the system retums a list of entities in response to a viewen query)

# 1) Viewer State Creation

Viewer state is created, assigning to the

- 1) Ranked entity states
- 2) Cascading data states
- 3) Cascading presentation states

Viewer state is either created ahead of dynamically by logic external to the time by system administrator, or

# 2) Viewer State Selection

Viewer state is assigned to current viewer thereby linking viewer to the collection of entity states, data states, and presentation states associated with the using logic external to the system, viewer state.

viewing process, our could be determined can be chosen by the viewer during the time, such as with a known customer, given viewer demographics purchase histories, etc. Viewer state can be known ahead of

# 3) Viewer Information Request

Viewer requests a list of one or more entities from the system. This request could either be for all entities parameters, e.g., gloves available in the by the viewer states), or be for a subset of interest to the viewer (as determined of entities as determined by search color red

# 4) Base Conditions Creation

creates a means of extracting all related data from System examines the viewer's viewer state and Entities and EntitiesData data stores. The product of this step is a subset of data from the 1) Entities are restricted to the entities related to the entityStates associated with the viewerState. data stores where:

Entities are ranked according to the order of the entityStates assoicated with the viewerState.

3) Elements of data related to each entity are selected from the EntitiesData data store related to each entity. The most appropriate data element for according to the cascading data states associated each dataType for each Entity will be selected with the viewerState

data set, where entities and data describing enties The resule is a data set, or a query that defines a has been ranked and/or restricted according to conditions set up in the viewerState.

# 5) Search

If the user does not specify any search criteria, this step is skipped

sets that have already been customized base conditions result set generated in If the user does specify search criteria, data, but are performed against result these criteria are then applied to the therefore not performed against raw the previous step. Searches are to the viewer state. When working with a SQL database, the base conditions result set may exist as a Searches will then be performed against the query. query instead of a true result set.

mechanisms, true result set generation may be required in tetthe previous step When working with other data storage

# 6) Display results

viewer for examination and selection. A list of entities is displayed to the

are presented only after a specific entity has been selected. Individual documents describing entities

See the related "Data Display Steps" flow chart.

Figure 12



Great allpurpose disposable glove

# General vinyl food gloves

Great for most general purpose sanitary food handling work, these gloves are constructed from a sturdy 4 mil vinyl. Ideal for any situaiton that demands a fast-on fast-off disposable glove.

*Prod.*# 112003

Color

Price

natural

\$7.60

Size Large

Reversable ambidextrous gloves fit either right or left hands (112003)





audio




Copyright ©2000 Firestar Systems Incorporated All rights reserved

Figure 13



Sehr guter universeller Einweghandschuh



# Universell eincusetzender Vinyl Handschuh

Dieser zweiteilige, beidseitig zu tragender, gemusterte fuselfreie Handshuh ist 9" lang. Strapazierfaehiger als Baumwolle, laeuft beim Waschen nicht ein. Mehrfacher Gebrauch, Händschuh wird meist in der Pharma- und Electro lindustrie eingesetzt.

Art.-Nr. 112003

Farbe

Preis

natur

€7 79

Groesse. Large

Strapazierfaehiger als Baumwolle, laeuft beim Waschen nicht ein. Mehrfacher Gebrauch (112003)






Copyright ©2000 Eirestar Systems Incorporated



# Vinyl barrier gloves

Great all-purpose disposable glove





Prod.#	Color	Price
112003	natural	\$8.40
		Size. Large

Reversable ambidextrous gloves fit either right or left hands (112003)



audio



Copyright ©2000 Firestar Systems Incorporated All rights reserved

Hart that they then the first that

Figure 15

Docket No. P24368 USA

# **Declaration and Power of Attorney For Patent Application English Language Declaration**

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

f	Delieve I am the onginal, fil first and joint inventor (if plu which a patent is sought on	ral names are listed bel		
g= 1	METHOD AND APPARATUS	FOR VIEWER-SPECIFIC	PRESENTATION OF INFOR	MATION
A COL				
	he specification of which			
14 14 (	check one)			
522				
1 : 1	ls attached hereto.	44.11	atani Ciatan Annitantian Na	as DOT international
[-# {		as U	nited States Application No	, or PC1 international
2	Application Number			
	and was amended on		(if applicable)	
THE			,	
	hereby state that I have rendered as amounted in the claims, as amounted in the claims, as a more than the control of the cont			identified specification,
,	acknowledge the duty to concern to me to be materiously 1.56.	disclose to the United State all to patentability as de	ates Patent and Trademar afined in Title 37, Code of	k Office all information f Federal Regulations,
) ! !	hereby claim foreign prior Section 365(b) of any foreign PCT International applications and have also inventor's certificate or PCT on which priority is claimed.	n application(s) for pater on which designated at identified below, by check International application	nt or inventor's certificate, o least one country other this king the box, any foreign a	r Section 365(a) of any nan the United States, opplication for patent or that of the application
5	Prior Foreign Application(s)			Priority Not Claimed
_				
	(Number)	(Country)		
-			(Day/Month/Year Filed)	<del></del>
_	(Number)	(Country)	(Day/Month/Year Filed) (Day/Month/Year Filed)	

Form PTO-85-01 (9-86) (Modified)

Parent and Trademark Office-U.S. DEPARTMENT OF

60/156,344 (Application Serial No.)	09/27/1999 (Filing Date)	
y opposition out at really	(s mig Data)	
(Application Serial No.)	(Filing Date)	
(Application Serial No.)	(Filing Date)	
ection 365(c) of any PCT Internation as the subject matter of conited States or PCT Internation. S.C. Section 112, I acknowled	ational application designating each of the claims of this app al application in the manner p ge the duty to disclose to the	any United States application(s), the United States, listed below are plication is not disclosed in the previousled by the first paragraph of United States Patent and Trademality, as defined in Title 37. C. F. In the States Patent and Trademality, as defined in Title 37. C. F. In the States Patent and Trademality, as defined in Title 37. C. F. In the States Patent and Trademality, as defined in Title 37. C. F. In the States Patent and Trademality as defined in Title 37. C. F. In the States Patent and Trademality as defined in Title 37. C. F. In the States application (s), the United States application (s
ection 365(c) of any PCT Internation as the subject matter of conited States or PCT Internation S.C. Section 112, I acknowled ffice all information known to a	ational application designating each of the claims of this app all application in the manner page the duty to disclose to the ne to be material to patentabable between the filling date of	the United States, listed below ar olication is not disclosed in the provided by the first paragraph of
ection 365(c) of any PCT Internation sofar as the subject matter of chited States or PCT Internation. S.C. Section 112, I acknowled ffice all information known to rection 1.56 which became available PCT International filling date of the section 1.56 which became available PCT International filling date of the section 1.56 which became available PCT international filling date of the section 1.56 which became available PCT international filling date of the section 1.56 which became available PCT international filling date of the section 1.56 which became available PCT international filling date of the section 1.56 which became available PCT international filling date of the section 1.56 which became available PCT international filling date of the section 1.56 which became available PCT internation 1.56 which became 1.56 which	ational application designating each of the claims of this application in the manner page the duty to disclose to the ne to be material to patentabable between the filling date of this application:	the United States, listed below are olication is not disclosed in the priorovided by the first paragraph of United States Patent and Trademality as defined in Title 37, C. F. I the prior application and the nation (Status)

fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

POWER OF ATTORNEY: As a named invariant to prosecute this application and to	ventor, I hereby appoint the following attorney(s) and/or transact ell business in the Patent and Trademark Office
connected therewith. (list name and registrate	
Alexis Barron, Reg. No. 22,702 Gregory S. Bernabeo, Reg. No. 44,032 Peter J. Butch, III, Reg. No. 32,203	Theodore Naccarella, Reg. No. 33,023 Joseph F. Posillico, Reg. No. 32,290 Joshus R. Slavitt, Reg. No. 40,816
John A. Chiouchio, P.E., Reg. No. 40,954 Esther Chong, Reg. No. 40,953 Stephen J. Driscoll, Reg. No. 37,564 Brett T. Freeman, Reg. No. 46,709 Gary A. Hecht, Reg. No. 36,826 Patrick J. Kelly, Ph.D., Reg. No. 34,638 Lisa B. Lanc, Reg. No. 38,217 Charles H. Lindrooth, Reg. No. 20,659	Mark D. Simpson, Reg. No. 32,942 John T. Synnestvedt, Reg. No. 18,117 Stephen J. Weed, Reg. No. 45,202 Genc J. Yao, Reg. No. 47,193
Send Correspondence to: Gregory S. Bernah Synnestvedt & Lec 2600 Aramark Tov Philadelphia, PA 1	chner LLP wer, 1101 Market Street
Direct Telephone Calls to: (name and teleph	
Gregory S. Bernaboo, Esquire Telephone: 215-92	
Oregory 3. Delanus, anjano receptions of	
Full name of sole or first inventor JOHN M. CRAWFORD, JR.	
Sole or first inventor's signature  Residence 27 School Street, Brunswick, ME 04011	27 Sep CC2
Citizenship USA	
Post Office Address Same as residence	
Full name of second inventor, if any	
	Date
Second Inventor's signature	
Residence	
Citizenship	
Post Office Address	